

Product Data Sheet

Modular Video Matrix Switchers and Input/Output Cards



AVS800,
front view



AVS800,
back view,
with signal cards
installed



AVS1600,
front view




AVS1600,
back view,
with signal cards
installed

Overview


- High-performance video and audio modular matrix switcher.
- Supports different video signals with cross switching. Every video or audio signal is transmitted and switched independently to decrease signal attenuation.
- Modular chassis with configurable I/O slots.
- Various I/O cards include HDMI, HDBaseT, DVI, and VGA cards (compatible with YUV, YC, and CVBS) to configure any matrix.
- True cross-point switching, any input to any output, regardless of signal format.
- All the cards support hot plug-and-play.
- Includes a power fail memory function.
- Audio can break away from or follow the video to the switch.
- Controllable via button, RS-232, and optional TCP/IP, also compatible with third-party control.
- Supports HDMI1.4a and 3D.
- Integrated HDBaseT technology.
- HDCP compliant.
- LCD display.

Modular Video Matrix Switchers and Input/Output Cards Data Sheet

Application diagram, AVS800.

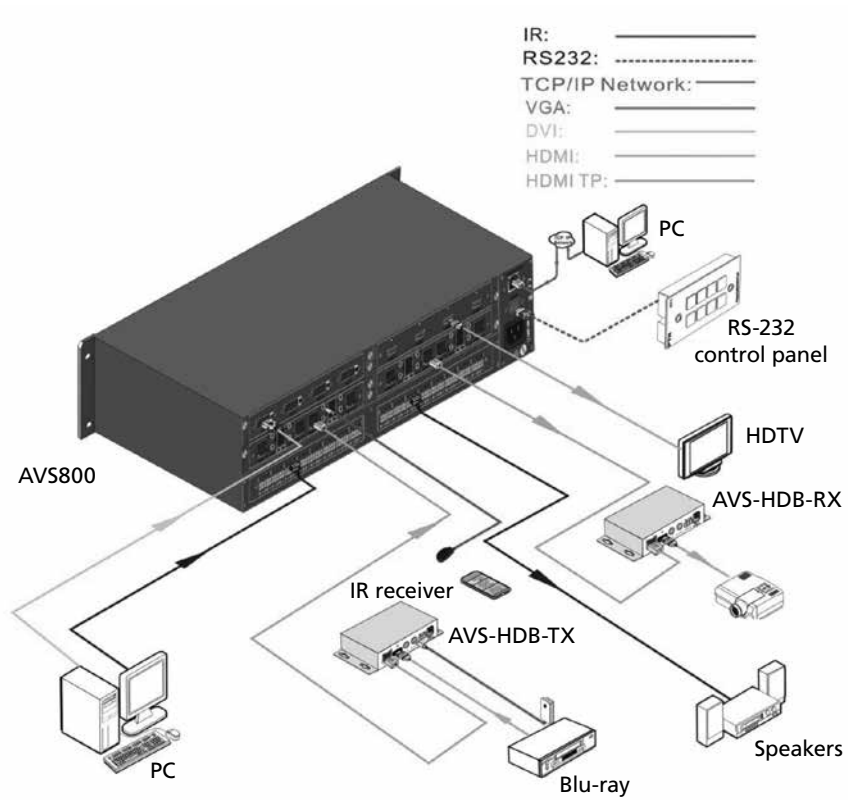

Application diagram, AVS1600.

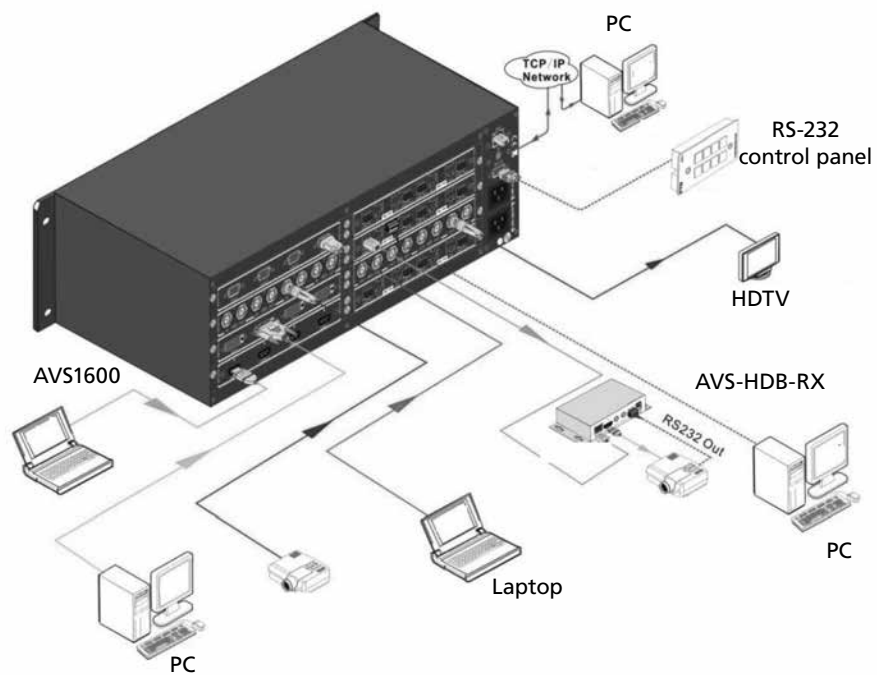

Modular Video Matrix Switchers and Input/Output Cards Data Sheet

Specifications: AVS800 and AVS1600

Hardware	
User Controls	Front-panel buttons
Connectors	<p>AVS800:</p> <p>Serial control port: RS-232 DB9 female DCE connector, Pin 2 = TX, Pin 3 = RX, Pin 5 = GND;</p> <p>(2) Input Card Slots, (2) Output Card Slots;</p> <p>Audio: Input: (8) 3.5-mm captive screw connectors 5-pole stereo, Output: (8) 3.5-mm captive screw connectors 5-pole stereo;</p> <p>TCP/IP port: (1) RJ-45;</p> <p>AVS1600:</p> <p>Serial control port: RS-232 DB9 female DCE connector, Pin 2 = TX, Pin 3 = RX, Pin 5 = GND;</p> <p>(4) Input Card slots; (4) Output card slots;</p> <p>TCP/IP port: (1) RJ-45</p>
Dimensions	<p>AVS800: 3.5"H x 19"W x 12.6"D (8.8 x 48.3 x 32 cm);</p> <p>AVS1600: 5.25"H x 19"W x 12.6"D (13.3 x 48.3 x 32 cm)</p>
Weight	<p>AVS800: 6.6 lb. (3 kg);</p> <p>AVS1600: 7.7 lb. (3.5 kg)</p>
Power	
Power Supply	100–240 VAC, 50/60 Hz
Power Consumption	<p>AVS800: 60 W (max.);</p> <p>AVS1600: 84 W (max.)</p>
Environment	
Temperature	-14 to +104° F (-10 to +40° C)
Humidity	10–90%
Audio (AVS800 Only, via Pre-Installed Stereo Audio Card)	
CMRR	>90 dB @ 20 Hz–20 kHz
Frequency response	20 Hz–20 kHz, ±0.5 dB
impedance	<p>Input: >10 K-ohms,</p> <p>Output: 50 ohms</p>
Stereo channel separation	>80 dB @ 1kHz
THD + Noise	1% @ 1 kHz, 0.3% @ 20 kHz at nominal level
Audio bits per sample	18 bits per channel, 2 channels (L, R)

Modular Video Matrix Switchers and Input/Output Cards Data Sheet

Product photos: AVS800 and AVS1600.



AVS800,
front view



AVS800,
back view,
with fixed
audio cards



AVS1600,
front view



AVS1600,
back view,
with signal cards
installed

I/O Cards that install in the AVS800 and AVS1600.

Input Cards		
Product Code	Inputs	Signal Format
AVS-4I-DVI	4	DVI
AVS-4I-UNI	4	DVI, HDMI, VGA, AV, YPbPr
AVS-4I-VGA	4	VGA and analog audio
AVS-4I-HDB	4	HDBT, RS-232, IR
AVS-4I-HDM	4	HDMI and analog audio
Output cards		
Product Code	Outputs	Signal Format
AVS-4O-DVI	4	DVI
AVS-4O-VGA	4 VGA, 4 stereo audio	VGA, analog audio
AVS-4O-HDM	4, 4 PCM audio	HDMI and analog audio
AVS-4O-HDB	4, 4 audio	HDBT, RS-232, IR

DVI I/O Cards: AVS-4I-DVI and AVS-4O-DVI

- Compatible with HDMI 1.3 and HDCP.
- Do not support audio signals.
- Use embedded EDID management technology.
- Support DDC.

AVS-4I-DVI input card:

- Input card with maximum of four input signals.
- Input signal can pass to an output device through AVS-4O-DVI, or pass through other kinds of output cards.



AVS-4I-DVI Card.

AVS-4O-DVI output card:

- Output card with maximum four output signals.
- Accepts output signals from AVS-4I-DVI, or other kinds of input cards.



AVS-4O-DVI Card.

Specifications for DVI I/O Cards: AVS-4I-DVI and AVS-4O-DVI

Input	
Connector	(4) female DVI
Input Level	TMDS 2.9–3.3 V
Input Impedance	75 ohms
Output	
Connector	(4) female DVI
Output Level	TMDS 2.9–3.3 V
Output Impedance	75 ohms
General	
Gain	0 dB
Bandwidth	340 MHz (10.2 Gbps)
Video Signal	DVI 1.0/HDMI 1.3 full digital TMDS signal
Switching speed	200 ns (max.)
Max. time delay	5 ns (± 1 ns)
Crosstalk	< -50 dB @ 5 MHz
EDID and DDC	Supports Extended Display Identification Data (EDID) and Display Data Channel (DDC) using DVI and HDMI standards. EDID and DDC signals are actively buffered
HDCP	Compliant with HDCP using DVI and HDMI 1.3 standards

Modular Video Matrix Switchers and Input/Output Cards Data Sheet

DVI Signal Card: AVS-4I-UNI

- Seamless DVI input signal card.
- Fully compatible with HDMI 1.3 and HDCP 1.4.
- Supports seamless transmission for high-definition DVI, HDMI, VGA, and YPbPr signals.
- Automatically identifies the format of the input signal, and adjusts the output resolution.
- Uses embedded EDID management technology, supporting DDC.
- Supports a maximum of four input signals.



AVS-4I-UNI input card.

Specifications for DVI Signal Card: AVS-4I-UNI

Input	
Connector	(4) female DVI
Input Level	TMDS 2.9–3.3 V
Input Impedance	75 ohms
General	
Gain	0 dB
Bandwidth	340 MHz (10.2 Gbps)
Video Signal	DVI, HDMI, VGA, Composite, YPbPr
Switching speed	200 ns (max.)
Max. time delay	5 ns (± 1 ns)
Crosstalk	< -50 dB @ 5 MHz
EDID and DDC	Supports Extended Display Identification Data (EDID) and Display Data Channel (DDC) using DVI and HDMI standards. EDID and DDC signals are actively buffered
HDCP	Compliant with HDCP using DVI and HDMI 1.3 standards

Pin Layout of the DVI-I connector (Dual-Link). (Female)



DVI-I connector.

DVI-I connector pinout.

Pin	Function	Pin	Function
1	TMDS Data 2-	13	TMDS Data 3+
2	TMDS Data 2+	14	+5V Power
3	TMDS Data 2/4 Shield	15	Ground (return for +5 V, Hsync and Vsync)
4	TMDS Data 4-	16	Hot-plug detect
5	TMDS Data 4+	17	TMDS Data 0-
6	DDC Clock	18	TMDS Data 0+
7	DDC Data	19	TMDS Data 0/5 Shield
8	Analog Vertical Sync	20	TMDS Data 5-
9	TMDS Data 1-	21	TMDS Data 5+
10	TMDS Data 1+	22	TMDS Clock Shield
11	TMDS Data 1/3 Shield	23	TMDS Clock +
12	TMDS Data 3-	24	TMDS Clock -

VGA Signal Cards: AVS-4I-VGA and AVS-4O-VGA

- Scale all inputs to 1080p.
- Compatible with Composite, YUV, YC (Factory preset function).
- Support RGBHV, RGsB, RGBS, RsGsBs, YUV, YC, and Composite video.

AVS-4I-VGA: input card

- Provides a maximum of four VGA inputs and four stereo audio inputs.
- Input signal can pass to output device through any kinds of output cards.



AVS-4I-VGA card.

AVS-4O-VGA: output card

- Maximum four VGA output signal and four stereo audio outputs.
- Accepts output video signal from AVS-4I-VGA, or other kinds of input cards.
- Accepts output audio signal from the audio of the input signal.




AVS-4O-VGA card.

Specifications for VGA Signal Cards: AVS-4I-VGA and AVS-4O-VGA

Video Input	
Connector	(4) HD 15-pin female VGA
Input Level	0.5–2.0 Vp-p
Input Impedance	75 ohms
Audio Input	
Connector	(4) stereo audio, 3-pin terminal block
CMRR	>90 dB @ 20 Hz – 20 kHz
Input impedance	>10 K
Video Output	
Connector	(4) HD 15-pin female VGA
Audio Output	
Connector	(4) 3.5-mm stereo audio
CMRR	>90 dB @ 20 Hz – 20 kHz
Input impedance	>10 K
General	
Gain	0 dB
Bandwidth	350 MHz (-3 dB), full load
Video Signal	VGA-UXGA, RGBHV, RGBS, RGsB, RsGsBs, component video, S-video, and Composite
Switching speed	200 ns (max.)
Max. time delay	5 ns (±1 ns)
Crosstalk	< -50 dB @ 5 MHz

Modular Video Matrix Switchers and Input/Output Cards Data Sheet

Pin layout of the VGA connectors (female):



VGA connector.

VGA connector pinout.

Pin	Function	Pin	Function
1	RED	9	KEY/PWR
2	GREEN	10	GND
3	BLUE	11	ID0/RES
4	ID2/RES	12	ID1/SDA
5	GND	13	HSync
6	RED_RTN	14	VSynC
7	GREEN_RTN	15	ID3/SCL
8	BLUE_RTN	—	—

Connect the devices via VGA-to-Component or VGA- to-Composite cable as shown below:



Connect with Component Video (YPbPr) Source



Connect with Composite Video (Composite) Source

HDMI Signal Cards: AVS-4I-HDM and AVS-4O-HDM

- 4K HDMI signal cards.
- Support hot-plug.
- Comply with HDMI 1.4 and HDCP 1.4 standards.
- Compatible with a DVI signal.
- Support a high-definition HDMI source up to 4K x 2K
- Comply with the 1080p 3D standard.
- Provide an auxiliary audio port as a supplement to HDMI embedded audio.
- Embedded with the EDID management technology.

AVS-4I-HDM input card:

- Supports a maximum of four input signals.
- Input signal can pass to an output device through AVS-4O-HDM, or pass through other kinds of output cards.



AVS-4I-HDM card.

NOTE: When matching with output cards that do not support 4K x 2K, adjust the output resolution to 1080p to enable reliable output.

AVS-4O-HDM Output card:

- Supports a maximum of four output signals.
- Outputs signals from AVS-4I-HDM, or other kinds of input cards.
- HDCP compliant status can be set via an RS-232 command.



AVS-4O-HDM card.

Specifications for HDMI Signal Cards: AVS-4I-HDM and AVS-4O-HDM

Video Input	
Connectors	(4) HDMI female
Input Level	TMDS 2.9–3.3 V
Input Impedance	100 ohms (differential)
Audio Input	
Connectors	(4) analog 3-pin pluggable terminal blocks
Input impedance	75 ohms
Frequency response	20 Hz – 20 kHz
Video Output	
Connector	(4) HDMI female
Output Level	TMDS 2.9–3.3 V
Output Impedance	100 ohms (differential)

Specifications for HDMI Signal Cards: AVS-4I-HDM and AVS-4O-HDM (continued)

Audio Output	
Connectors	(4) analog 3-pin pluggable terminal blocks
Output impedance	75 ohms
Frequency response	20 Hz – 20 kHz
Environment	
Temperature	-14 to +104° F (-10 to +40° C)
Humidity	10–90%
General	
Gain	0 dB
Bandwidth	6.75 Gbps
Crosstalk	< -50 dB @ 5 MHz
Max. Resolution	4K x 2K
Transmission Distance	1080p < or = 70 m; 4K x 2K < or = 40 m
Switching speed	200 ns (max.)
SNR	> 70 dB @ 100 MHz - 100 m
Return loss	< -30 dB @ 5 kHz
HDMI standard	Supports HDMI 1.4 and DVI 1.0
Supported audio format	Embedded HDMI audio: PCM, Dolby Digital, DTS, DTS-HD; Analog audio: PCM
EDID and HDCP management	Compliant with HDCP 1.4; supports manual EDID management

HDMI connector pin layout.

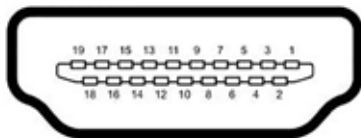


Figure 2-13. HDMI female connector.

HDMI connector pinout.

Pin	Function	Pin	Function
1	TMDS Data 2-	11	TMDS Clock Shield
2	TMDS Data 2 Shield	12	TMDS Clock-
3	TMDS Data 2-	13	CEC
4	TMDS Data 1+	14	Not connected
5	TMDS Data 1 Shield	15	DDC Clock
6	TMDS Data 1-	16	DDC Data
7	TMDS Data 0+	17	Ground
8	TMDS Data 0 Shield	18	+5 V Power
9	TMDS Data 0-	19	Hot-plug detect
10	TMDS Clock+	20	SHELL

4K Twisted-Pair Cards: AVS-4I-HDB and AVS-4O-HDB

4K Twisted pair card (HDMI/DVI extender):

- Support hot-plug.
- Support HDTV.
- Compatible with HDBT 1.0, HDMI 1.4a and HDCP 1.4.
- Support a wide resolution range from 480p to 4K x 2K.
- Comply with the 1080p 3D standard.
- Extend an HDBT signal up to 70 m at 1080p or 40 m at 4K.
- Support bi-directional RS-232 transmission on a single cable.
- Auxiliary audio ports support a stereo signal.
- Embedded with the EDID management technology.

AVS-4I-HDB Input card:

- Supports a maximum input of four HDMI TP signals.
- Input signal can pass to the output device through AVS-4O-HDB, or pass through other kinds of output cards that need to work with an HDBT transmitter.



AVS-4I-HDB card.

NOTE: When matching with output cards that do not support 4K x 2K, adjust the output resolution to 1080p to enable reliable output.

AVS-4O-HDB Output card:

- Supports a maximum of four output HDBT signals.
- Outputs signals from AVS-4I-HDB or other kinds of input cards that need to work with an HDBT receiver.



AVS-4O-HDB card.

Specifications for 4K Twisted-Pair Cards: AVS-4I-HDB and AVS-4O-HDB

AVS-4I-HDB and AVS-4O-HDB specifications.

Video Input	
Connectors	(4) HDBT RJ-45 female (with dual-color indicator)
Input Level	TMDS 2.9–3.3 V
Input Impedance	100 ohms (differential)
Audio Input	
Connectors	(4) 3.5-mm stereo audio connectors
Input Impedance	75 ohms
Frequency Response	20 Hz to 20 kHz
Video Output	
Connector	(4) HDBT RJ-45 female (with dual-color indicator)
Output Level	TMDS 2.9–3.3 V
Output Impedance	100 ohms (differential)


Modular Video Matrix Switchers and Input/Output Cards Data Sheet

Specifications for 4K Twisted-Pair Cards: AVS-4I-HDB and AVS-4O-HDB (continued)

AVS-4I-HDB and AVS-4O-HDB specifications.

Control Port	
Control signal	(4) RS-232
Control connector	3-pin pluggable terminal block
Audio Output	
Connectors	(4) 3.5-mm stereo audio connectors
Input Impedance	75 ohms
Frequency Response	20 Hz to 20 kHz
General	
Gain	0 dB
Bandwidth	10.2 Gbps
Crosstalk	< -50 dB @ 5 MHz
Max. Resolution	4K x 2K
Transmission Distance	1080p < or = 70 m; 4K x 2K < or = 40 m
Switching speed	200 ns (max.)
SNR	>70 dB @ 100 MHz - 100 M
Return loss	< -30 dB @ 5 kHz
Supported audio format	Embedded HDMI audio: PCM, Dolby Digital, DTS, DTS-HD; Analog audio: PCM
HDMI standard	Supports HDMI 1.4
EDID and HDCP management	Compliant with HDCP 1.4; Supports manual EDID management
Environment	
Temperature	-14 to +104° F (-10 to +40° C)
Humidity	10–90%

Cable pinout diagram.

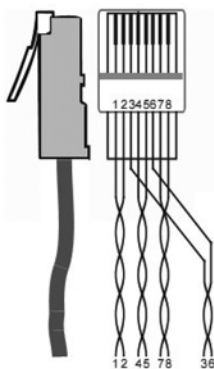

TIA pinouts.

TIA/EIA 568A connector pinout.		TIA/EIA 568B connector pinout.	
Pin	Cable Color	Pin	Cable Color
1	Green/White	1	Orange/White
2	Green	2	Orange
3	Orange/White	3	Green/White
4	Blue	4	Blue
5	Blue/White	5	Blue/White
6	Orange	6	Green
7	Brown/White	7	Brown/White
8	Brown	8	Brown

NOTE: Cable connectors must be metal, and the shielded layer must be connected to the connector's metal shell to ground the cable.

Stereo Audio Card (Pre-Installed in AVS800)


- 8 x 8 stereo audio crosspoint switching card is pre-installed in AVS800.
- Supports balanced/unbalanced audio via a different connection.
- Cannot be hot-plugged—you must power off the unit to remove or install the card in the chassis.



Audio card.



Balanced Audio Connection.



Unbalanced Audio Connection.

Specifications for Stereo Audio Card (Pre-Installed in AVS800)

Stereo Audio Card specifications.

Input Connectors	(8) 3.5-mm stereo captive screw connectors, 5-pole
Input Level	TMDS 2.9–3.3 V
Input Impedance	> 10 k-ohms
Output Connectors	(8) 3.5-mm stereo captive screw connectors, 5-pole
Output impedance	50 ohms
General	
Frequency Response	20 Hz – 20 kHz, ± 0.5 dB
CMRR	>90 dB @ 20 Hz – 20 kHz
Stereo channel separation	>80 dB @ 1 kHz
THD + Noise	1% @ 1 kHz, 0.3% @ 20 kHz at nominal level
EDID and DDC	Supports Extended Display Identification Data (EDID) and Display Data Channel (DDC) using DVI and HDMI standards. EDID and DDC signals are actively buffered.
HDCP	Compliant with HDCP using DVI and HDMI 1.3 standards

Ordering Information

Item	Code
Modular Video Matrix Switcher	
8 x 8	AVS800
16 x 16	AVS1600
Input Signal Cards	
DVI	AVS-4I-DVI
DVI, HDMI, VGA, AV, YPbPr	AVS-4I-UNI
VGA	AVS-4I-VGA
HDBaseT	AVS-4I-HDB
HDMI	AVS-4I-HDM
Output Signal Cards	
DVI	AVS-4O-DVI
VGA, Analog Audio	AVS-4O-VGA
HDMI and Analog Audio	AVS-4O-HDM
HDBaseT, RS-232, IR	AVS-4O-HDB

Disclaimer:

Black Box Network Services shall not be liable for damages of any kind, including, but not limited to, punitive, consequential or cost of cover damages, resulting from any errors in the product information or specifications set forth in this document and Black Box Network Services may revise this document at any time without notice.

About Black Box:

Black Box is a leading technology product solutions provider that helps customers build, manage, optimize, and secure their professional audio/video, signal distribution, and digital signage networks. The company is a single source for digital signage content managers, networked digital signage players, professional audio/visual equipment, including controllers, extenders, splitters, converters, and presentation systems. Black Box provides its customers with free, 24/7 pre- and post-sales technical support.

© Copyright 2016. Black Box Corporation. All rights reserved. Black Box® and the Double Diamond logo are registered trademarks of BB Technologies, Inc. Any third-party trademarks appearing in this publication are acknowledged to be the property of their respective owners.